
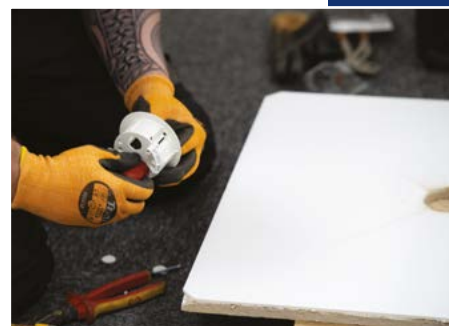


TUFFLEX TILE MAKES CEILING INSTALLATIONS SO EASY

The Tufflex Tile offers a super lightweight alternative to using plywood or MDF as a pattrass in suspended ceiling installations.

Easy to handle and strong, the Tufflex Tile is flame retardant and LSF removing a key component of the fire triangle.

- ✓ Super lightweight Correx tiles 595 x 595mm
- ✓ No need to cut or saw plywood/MDF
- ✓ Pre-chamfered edges for a quick fit
- ✓ Flame retardant and self-extinguishing
- ✓ Requires less PPE (as no need for cutting and sawing)
- ✓ No waste or dust
- ✓ Weight tested to 5kg

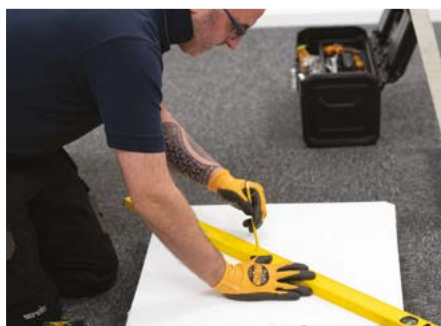

Marshall-Tufflex Ltd

55-65 Castleham Road
St Leonards on Sea
TN38 9NU
United Kingdom

T +44 (0)1424 856600
E sales@marshall-tufflex.com
www.marshall-tufflex.com

UK OWNED
UK MANUFACTURER





WATCH THE VIDEO



Tufflex Tile



code	size	pack
CPT1	595 x 595 x 4mm	25

Compliance and Standards

- DIN 4102 Class B1
- UL94 V2 (reduced to V2 because of droplets, otherwise V0 behaviour)
- ASTM D635 burning time less than 5 seconds
- BS 4662:2006+A1:2009 15.4.3.3 - Pass
- BS 2782 Method 508A - Pass
- UK Building Regs Part B

Regulations

BS 7671 18th edition wiring regulations (regulation 134.1.1) states that 'the installation of electrical equipment shall take account of manufacturers' instructions - manufacturers recommend that a pattress is required for fixing fittings in suspended ceiling installations.'

Dry lining boxes



Double back entry - loop in
34mm internal depth (white clamps)

code	fix. centre	pack
MDCRB2WH	50.8/60.3mm	10

Ø cut out = 70mm



1 gang
34mm internal depth

code	adjustment	pack
MDLB1WH	6-14mm	20

Marshall-Tufflex Ltd

55-65 Castleham Road
St Leonards on Sea
TN38 9NU
United Kingdom

T +44 (0)1424 856600
E sales@marshall-tufflex.com
www.marshall-tufflex.com

UK OWNED
UK MANUFACTURER

