


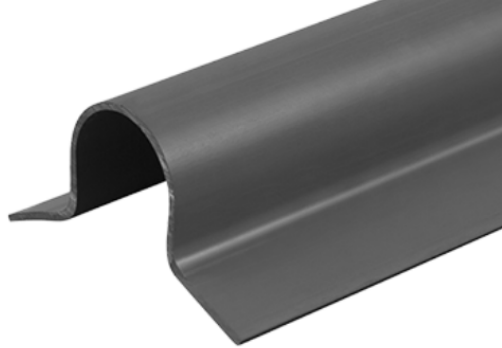

## Cable Protection Guard Product Data Sheet

Product Range	Cable Protection Guard CG19BK, CG25BK, CG40BK, CK55BK, CG80K	<p>Image for reference only</p> 
Description	PVCu Cable Protection Guard	
Key Features	Very Heavy Gauge Pre-punched fixing holes to assist installation Operating Temperature -5°C to +60°C Non-Flame Propagating to BS EN 61386-1 High Impact Resistance to -5°C Very Heavy Gauge Requirements of BS EN 50085-1	
Dimensions	CG19BK - 19mm x 19mm x 3m CG25BK - 25mm x 25mm x 3m CG40BK - 40mm x 40mm x 3m CK55BK - 50mm x 50mm x 3m CG80K - 80mm x 80mm x 3m	
Material(s)	PVCu	
Compliance / Standards(s)	CE & UKCA Marked Low Voltage Directive 2014/35/EU The Electrical Equipment (Safety) Regulations 2016 BS 7671:2018 BS EN 61386-1:2008+A1:2019 BS EN 50085-1:2005+A1:2013	
Packaging	Recyclable	

### Sustainability

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our PVC-U products are manufactured from an average of 80% recycled plastic, with some extruded products produced from 100% recycled material.



Cable Guard is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.

<https://www.marshall-tufflex.com/reassuringly-recycled>