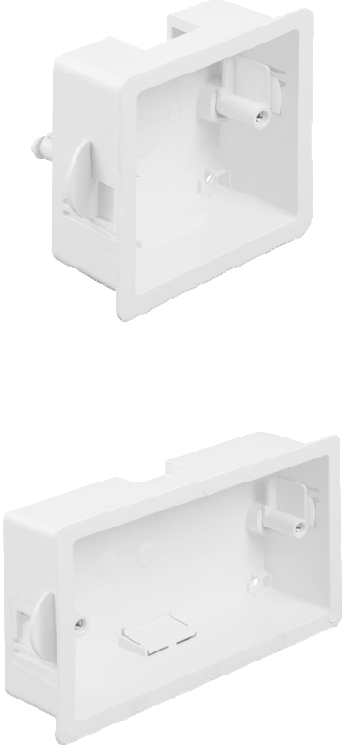


Bendex Flush Mounted Dry Lining Box Product Data Sheet

Product Range	BDL1WH and BDL2WH	<p>Image for reference only</p> 
Description	Flush mounted Dry Lining Box for use within stud walls.	
Key Features	Wide securing outer flange. To suit board thickness from 6mm to 14mm Swivel snap out clamps Multiple Entry points	
Dimensions	BDL1WH: 83mm x 83mm (Flange) Wall Cut Out 74mm x 74mm Minimum 34mm Internal Depth BDL2WH: 143mm x 83mm (Flange) 34mm Internal Depth Wall Cut Out 134mm x 74mm Minimum	
Material(s)	PVCu with Brass Inserts	
Compliance / Standards(s)	CE & UKCA Marked Low Voltage Directive 2014/35/EU The Electrical Equipment (Safety) Regulations 2016 BS 7671:2018 BS 5733:2010+A1:2014 BS EN 60695-2-11:2021	
Packaging	Recyclable	

Sustainability

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our PVC-U products are manufactured from an average of 80% recycled plastic, with some extruded products produced from 100% recycled material.

Dry Lining Boxes are manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.

<https://www.marshall-tufflex.com/reassuringly-recycled>

