


Conduit (Light Gauge) Product Data Sheet

Product Range	Conduit	<p>Image for reference only</p> 												
Description	PVCu Round Conduit Light Gauge													
Key Features	<p>Range of Inspection Elbows, Bends & Tees</p> <p>Range of fittings</p> <p>Range of Round & Square boxes</p> <p>Operating Temperature -5°C to +60°C</p> <p>Non-Flame Propagating to BS EN 61386-1</p> <p>High Impact Resistance to -5°C Heavy Gauge Requirements of BS EN 61386-1</p>													
Dimensions	Refer to table													
Material(s)	PVCu (White and Black)													
Compliance / Standards(s)	<p>CE & UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS EN 61386-1:2008+A1:2019</p> <p>BS EN 61386-21:2004+A11;2010</p> <p>BS 4607-1:1984+A2:2010</p> <p>BS 4607-5:1982+A3:2010</p>													
Packaging	Recyclable	<table border="1"> <thead> <tr> <th>Product Code</th> <th>Nominal Outside Diameter</th> <th>Minimum Inside Diameter</th> </tr> </thead> <tbody> <tr> <td>CR2</td> <td>20.0mm</td> <td>17.3mm</td> </tr> <tr> <td>CR3</td> <td>25.0mm</td> <td>21.4mm</td> </tr> <tr> <td>CR4</td> <td>32.0mm</td> <td>28.4mm</td> </tr> </tbody> </table>	Product Code	Nominal Outside Diameter	Minimum Inside Diameter	CR2	20.0mm	17.3mm	CR3	25.0mm	21.4mm	CR4	32.0mm	28.4mm
Product Code	Nominal Outside Diameter	Minimum Inside Diameter												
CR2	20.0mm	17.3mm												
CR3	25.0mm	21.4mm												
CR4	32.0mm	28.4mm												

Sustainability

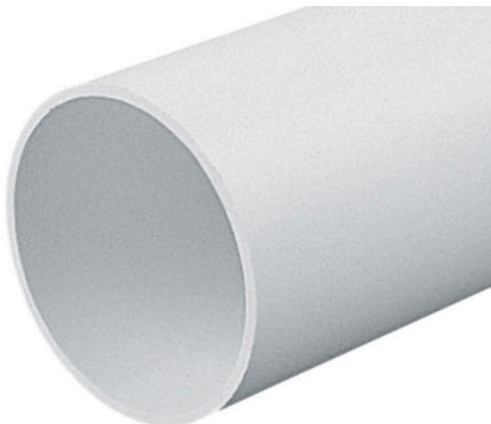

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our white extruded Conduit and Channel PVC-U products are manufactured from a minimum of 80% recycled material and up to 100% recycled content, depending on material availability.

This range is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.