


Bendex Light Gauge Conduit Product Data Sheet

Product Range	LG20 & LG25	<p>Image for reference only</p> 									
Description	PVCu Round Conduit										
Key Features	Light Gauge Range of Inspection Elbows, Bends & Tees Range of fittings Range of Round & Square boxes Operating Temperature -5°C to +60°C Non-Flame Propagating to BS EN 61386-1										
Dimensions	Refer to table										
Material(s)	PVCu (White and Black)										
Compliance / Standards(s)	CE & UKCA Marked Low Voltage Directive 2014/35/EU The Electrical Equipment (Safety) Regulations 2016 BS 7671:2018 BS EN 61386-1:2008+A1:2019 BS EN 61386-21:2021+A11;2021 BS 4607-1:1984+A2:2010 BS 4607-5:1982+A3:2010 BS EN 60695-2-11:2021										
Packaging	Recyclable	<table border="1"> <thead> <tr> <th>Product Code</th> <th>Nominal Outside Diameter</th> <th>Minimum Inside Diameter</th> </tr> </thead> <tbody> <tr> <td>LG20</td> <td>20.0mm</td> <td>17.3mm</td> </tr> <tr> <td>LG25</td> <td>25.0mm</td> <td>21.4mm</td> </tr> </tbody> </table>	Product Code	Nominal Outside Diameter	Minimum Inside Diameter	LG20	20.0mm	17.3mm	LG25	25.0mm	21.4mm
Product Code	Nominal Outside Diameter	Minimum Inside Diameter									
LG20	20.0mm	17.3mm									
LG25	25.0mm	21.4mm									

Sustainability

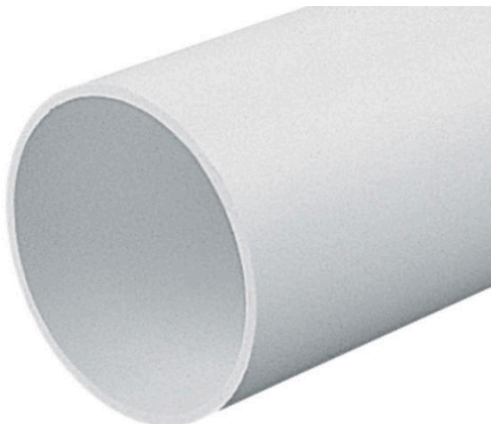

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our white extruded Conduit and Channel PVC-U products are manufactured from a minimum of 80% recycled material and up to 100% recycled content, depending on material availability.

This range is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.