


## Bendex Oval Conduit Product Data Sheet

Product Range	OC13WH, OC16WH, OC20WH, OC25WH & OC32WH	<p>Image for reference only</p> 
Description	PVCu Oval Conduit and accessories	
Key Features	<p>Light Gauge</p> <p>Range of fittings</p> <p>Operating Temperature -5°C to +60°C</p> <p>Non-Flame Propagating to BS EN 61386-1</p> <p>High Impact Resistance to -5°C Heavy Gauge Requirements of BS EN 61386-1</p>	
Dimensions	<p>OC13WH – 13mm x 8.6mm x 3m</p> <p>OC16WH – 16mm x 10mm x 3m</p> <p>OC20WH – 20mm x 11mm x 3m</p> <p>OC25WH – 25mm x 11mm x 3m</p> <p>OC32WH – 32mm x 12mm x 3m</p>	
Material(s)	PVCu (White only)	
Compliance / Standards(s)	<p>CE &amp; UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS EN 61386-1:2008+A1:2019</p> <p>BS EN 60386-21:2021+A11:2021</p> <p>BS 4607-1:1984+A2:2010</p> <p>BS 4607-5:1982+A3:2010</p> <p>BS EN 60695-2-11:2021</p>	
Packaging	Recyclable	

### Sustainability

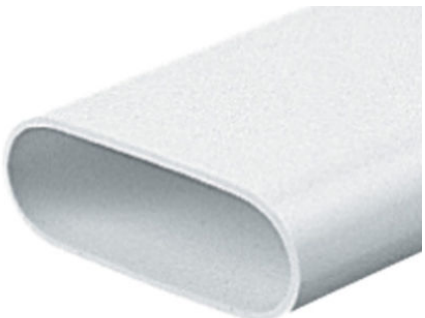

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our white extruded Conduit and Channel PVC-U products are manufactured from a minimum of 80% recycled material and up to 100% recycled content, depending on material availability.

This range is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.