TUFFLEX TILE

The Tufflex Tile is a quick and easy pattress solution that takes the hassle out of traditional ceiling installations. A cleaner, lighter, safer and faster alternative to wood solutions, the Tufflex Tile is super lightweight, strong and easy to cut or drill meaning installations can be completed far more quickly. Additionally, the product is flame retardant and LSF removing a key component of the fire triangle.


Product information

- · Super lightweight Correx material that's easy to handle and store
- Pre-cut 595 x 595mm squares to suit standard ceiling tile dimensions
- No need to cut or saw plywood/MDF
- · Pre-chamfered edges for a quick fit
- Tested to hold a 5kg load
- · Flame retardant and low smoke fume (LSF)
- Requires less PPE (as no need for cutting and sawing)
- No waste or dust (as no need for cutting and sawing)

Regulations

BS 7671 18th edition wiring regulations, regulation 134.1.1 states that 'the installation of electrical equipment shall take account of manufacturers' instructions - manufacturers recommend that a pattress is required for fixing fittings in suspended ceiling installations.'






fflex Tile



Tufflex tile		
code		pack
CPT1	595 x 595 x 4mm	25

Compliance & Standards

- DIN 4102 Class B1
- UL94 V2 (reduced to V2 because of droplets, otherwise V0 behaviour)
- ASTM D635 burning time less than 5 seconds
- BS 4662:2006+A1:2009 15.4.3.3 Pass
- BS 2782 Method 508A Pass
- UK Building Regs Part B

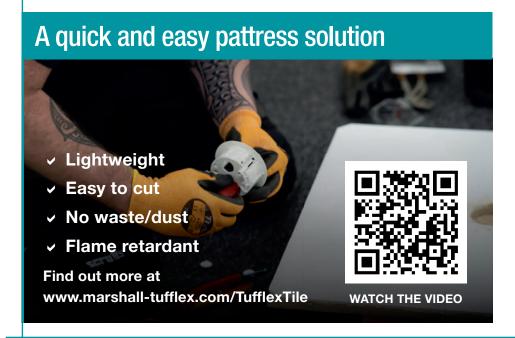

For dry lining boxes see page 48