


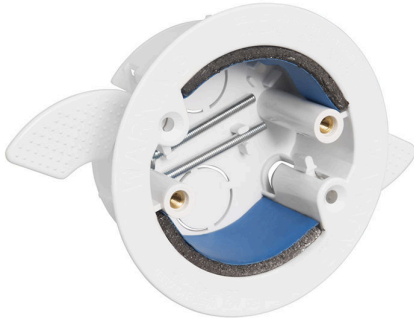

## MDCRB2F Product Data Sheet

Product Range	Dry Lining Boxes	<p>Image for reference only</p> 
Description	Double Back Entry Fire Barrier	
Key Features	<p>Wide securing flange.</p> <p>To suit board thickness from 9 to 32mm</p> <p>Auto swivel snap out clamps</p> <p>Intumescent fire barrier pads</p> <p>Dual ø20mm Knockouts</p> <p>Max load at 60°C 3Kg (Ceiling Application)</p>	
Dimensions	Internal Ø65 x 34mm deep	
Material(s)	PVCu	
Compliance / Standards(s)	<p>CE &amp; UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS 5733:2010+A1:2014</p> <p>BS 476-22:1987</p> <p>BS 476:20 Fire Integrity and Insulation 181 Minutes*</p> <p>*Test conducted in accordance with the principles of BS 476:20 (within blockwork): Test stopped at 181 minutes</p> <p>BS467:20 Fire Integrity and Insulation 63 minutes**</p> <p>**Test conducted in accordance with the principles of BS 476:20 (within 12mm drywall): Test stopped at 63 minutes</p> <p>The Building Regulations Approved Document B</p>	
Packaging	Recyclable	

### Sustainability

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.



This range is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.