




Sterling Compact Product Data Sheet

| | | |
|---------------------------|---|--|
| Product Range | PVC-U Perimeter Trunking Systems | <p>Image for reference only</p>  |
| Description | Sterling Compact Trunking | |
| Key Features | <p>Supplied in 3m Lengths</p> <p>1 main compartment and 2 smaller outer compartments</p> <p>Suitable for dado application</p> <p>Up to CAT 7a Compliant</p> <p>Range of accessory boxes and fittings available</p> <p>Impact (Lengths) – IK08 (5 Joules)</p> <p>Impact (Fittings) – IK08 (5 Joules)</p> | |
| Dimensions | 140mm x 50mm Profile | |
| Material(s) | PVCu | |
| Compliance / Standards(s) | <p>CE & UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS EN 50085-1:2005+A1:2013</p> <p>BS EN 50085-2-1:2006+A1:2011</p> <p>BS 5733:2010+A1:2014</p> <p>BS EN IEC 60695-2-11:2021</p> | |
| Packaging | Recyclable | |

Sustainability

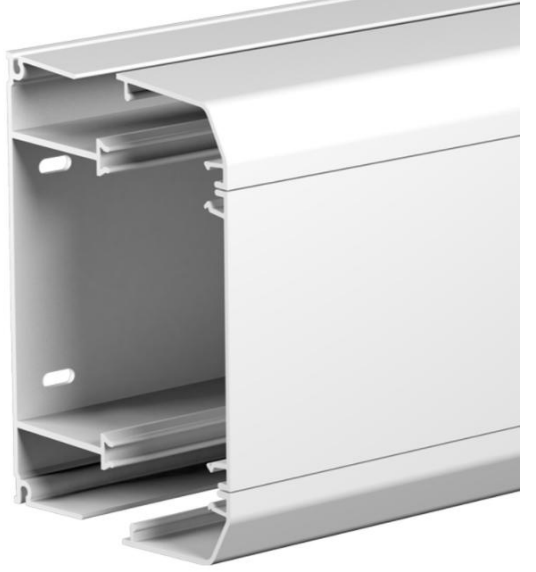

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our extruded PVC-U products are manufactured from combination of recycled PVC-U and virgin PVC-U with some base products produced from 100% recycled material.

This range is manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.