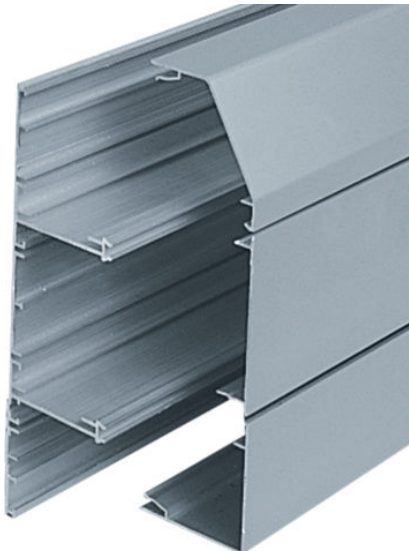


XL302 Product Data Sheet

Product Range	Aluminium Trunking	<p>Image for reference only</p> 
Description	XL302	
Key Features	<ul style="list-style-type: none"> Tamper proof covers Built in cable tray Flush fitting accessory boxes First Class EMC/EMI screening performance Fabricated Bends CAT 6 compliant Part M Boxes Flame Retardancy for Polycarbonate Fittings UL94 V0 @ 1.5mm Impact (Lengths) – IK10 (20 Joules) Impcat (Fittings) – IK08 (5 Joules) 	
Dimensions	220mm x 65mm Profile	
Material(s)	Aluminium and Polycarbonate (Moulded Fittings)	
Compliance / Standards(s)	<ul style="list-style-type: none"> CE & UKCA Marked Low Voltage Directive 2014/35/EU The Electrical Equipment (Safety) Regulations 2016 BS 7671:2018 BS EN 50085-1:2005+A1:2013 BS EN 50085-2-1:2006+A1:2011 BS 5733:2010+A1:2014 	
Packaging	Recyclable	

Sustainability

Sterling XL Trunking is manufactured from Aluminium, a material that is 100% recyclable