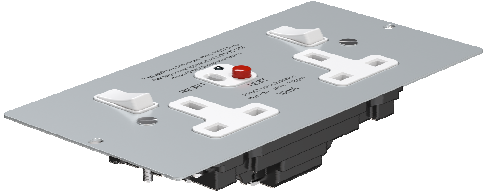



## Floor Box RCD Twin Socket 3 Compartment Std

Product Range	UP660	Image for reference only 
Description	Floor Box RCD Twin Socket 3 Compartment Std <i>Note: Not suitable for use with the In-Screed flooring system</i>	
Key Features	13A Latching RCD DP (Type A) <b>Rated Voltage:</b> 220-250V <b>Frequency:</b> 50-60Hz <b>IP Rating:</b> IP2X <b>Rated fault current:</b> 30mA <b>Ambient Operating Temperature:</b> -5 to 40°C (24Hr average not exceeding 25°C)	
Dimensions	Terminal Capacity: 3 x 2.5mm 3 x 4.0mm 2 x 6.0mm Minimum box depth: 35mm	
Material(s)	Painted steel plate	
Compliance / Standards(s)	BS 7671:2018 BS 7288:2016 BS 1363-2:2016+A1:2018	
Packaging	Recyclable	

Sustainability	
RoHS Compliant	 WEEE Compliant